

CDM


CDM-ISO-SEB



Simple Elastomer Bearings are used to isolate buildings where the required natural frequency is between 6Hz and 15Hz. The bearings consist of simple or composite elastomer pads, occasionally pre-glued to formwork panels.

The bearings can be manufactured to suit all types of standard construction, for example load bearing masonry, reinforced concrete frames, steel construction etc...

Fretted Elastomeric Bearing

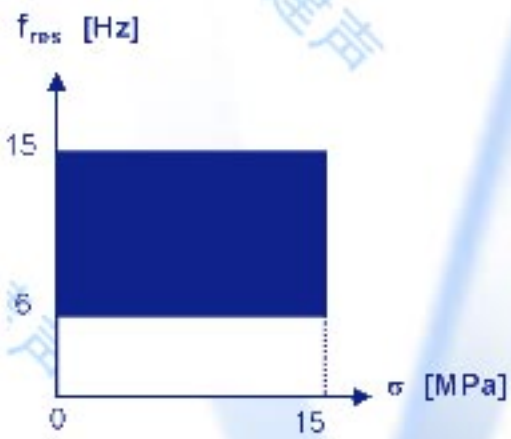

Load bearing masonry strip, 11Hz



Reinforced concrete frame isolation bearings, 10Hz

Load-Frequency Range

